

TRIMMER LUG


When improvement really matters

Trimmer Lug

Trimmer Lugs are used to convey sawn wood through the scanner, trimmer and several other operations in a sawmill.

- Standardize operations and reduce inventory on replacement parts.

TL Trimmer Lug

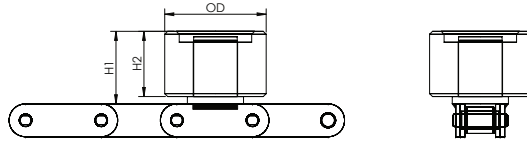

All dimensions in inches unless otherwise stated.

	Roller Style A			Roller Style B		
	H ₁	H ₂	OD	H ₁	H ₂	OD
81X	2.75	2.50	2.75	2.50	2.25	3.50
C2100H	2.75	2.50	2.75	2.50	2.25	3.50
C2080H	2.75	2.50	2.75	2.50	2.25	3.50


Note: Trimmer Lug will be welded on to the pin link or roller link depending on spacing requirements. Specify standard dimensions (OD or A) when ordering. Tsubaki also offers various sizes of trimmer lug weld-on attachments. Contact Tsubaki for more information.

81XPTLA10L260PMT

How To Order:

How To Order Sell Sheet			
Example	Description		
81X	Chain Size		
P	Tier	Blank	Econo
		P	Premium
		L	Lambda
TL	Attachment Type	TL	Trimmer Lug
A	Roller Type	A	See page 26
		B	See page 26
10L	Attachment Spacing	xxL	Every xxL Link (e.g. 10L = every 10th link) Note: (1) If spacing is even, attachment is supplied on the pin link unless otherwise instructed. If spacing is odd, attachment alternates on the pin link and roller link.
		Blank	Supply in 10ft strands
260P	Length	xxP	xx Pitch Strands (e.g. 260P = 260P Strand) Note: (1) Total chain length should be divisible by the attachment spacing. (2) Chain will be supplied in suitable lengths for shipping with a conn link at each section.
		MT	MT – Matched and Tagged strands – Recommended for all multi-strand timed applications. E.g. Scanner, Trimmer, Drop Sorter

Pusher

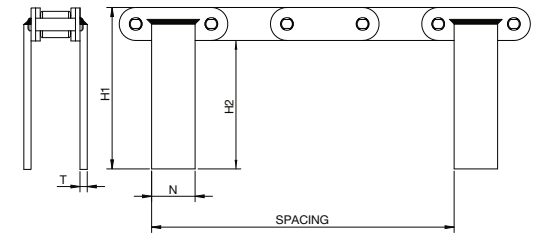

Height*	Att Name Part No.	Top of Chain to Top of Attachment	Bottom of Chain to Top of Attachment	Attachment Width	Attachment Thickness
		H ₁	H ₂	N	T
3 3/16	81XPU3LATT	3.188	4.313	1.500	0.250
4 3/16	81XPU4LATT	4.188	5.313	1.500	0.250

*HEIGHT AS MEASURED FROM TOP OF CHAIN
CUSTOM ATTACHMENTS AVAILABLE UPON REQUEST. CONTACT TSUBAKI WITH YOUR REQUIREMENTS